


SMOOTH FLOW by FL-EX®

Pulse-Acc - Single membrane absorbers for hose pumps and AODD pumps



Top-down

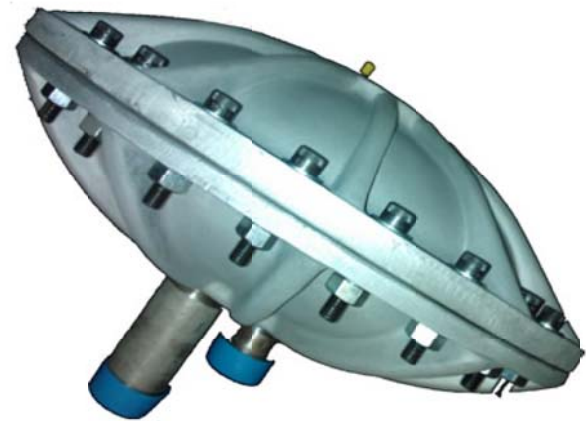


Bottom

Fl-ex Diaphragm



**Deign by Finite
Element Analysis**

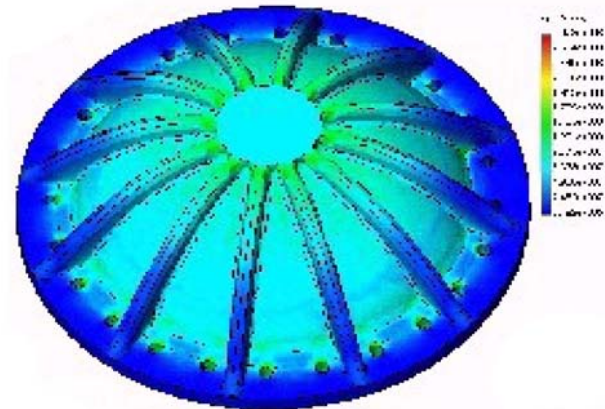

FlowExperts
a smooth flow company

cynthiachoo@gsepl.com
ishopan1_engg@yahoo.co.in
bjzrx@163.com
sales@flowexperts.fi

Pulse-Acc - Single membrane absorbers

The Pulse-Acc Range

- In Place flow through flushability
- Pressure wave interception
- High frequency attenuation
- Perfect for high viscosities
- Shallow diaphragm deflection for PTFE membranes
- For AODD and Hose Pumps


The Range

Model	Port	Bar (MAWP)	Liter	Diameter	Height	Kg
PaC/29 610	100mm 4" 150#	28	38	725 mm	390 mm	80
PaC/23* 450	75mm 3" 150#	28	18	560 mm	250 mm	40
PaC/20* 400	63mm 2.5" M npt	40	9	520 mm	280 mm	50
PaC/16* 305	50mm 2" M npt	40	4.2	400 mm	240 mm	37
PaC/14 250	38mm	34	2	343 mm	190 mm	18
PaC/10* 173	25mm 1" M npt	34	1.0	250 mm	165 mm	9
PaC/8.7 155	20mm	34	0.5	220 mm	115 mm	6


* Inventory / Stock items

Materials

Membranes: Nitrile, EP, PTFE, etc. / Wetted Parts: Aluminum, Scotchcoat 1mm, Cast Iron
For other volumes, pressures, materials, and connections please goto PulseGuard.co.uk or PulseGuard.com

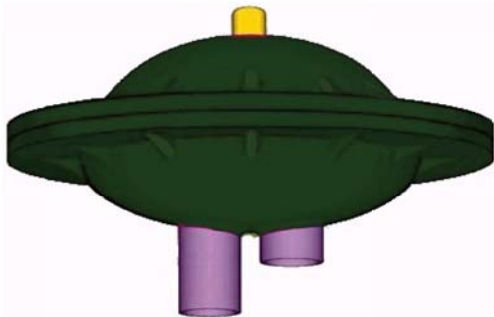

Pulsation Accumulators from FL-EX Finland

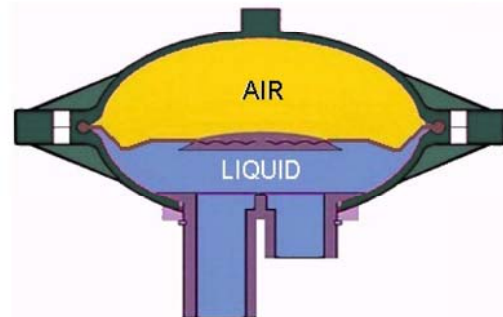

Please see Hydraulic-Accumulators.sg
bottom left of home page.